


# FWD216DS

## Printex™ Wallcovering Fabric DS

No need to prepare wall surfaces by pre painting white. Simply clean wall and apply fabric over existing colour. Can be treated with water repellent and flame retardant finishes to European standard DIN 4102 Level B1 or American standard ASTM E84.

**ATTENTION!**  
 SUBLIMATION  
 TEMPERATURE  
**180°C**  
 MAXIMUM!

PRODUCT SPECIFICATIONS	
Quality:	FWD216DS
Finish	Coated
Composition	100% Polyester
Description	Wall covering
Widths	160cm, 260cm, 320cm
Mass	315g/m <sup>2</sup>
Colour	WH001
Print Route	
Features & Benefits:	<ul style="list-style-type: none"> <li>• PVC Free</li> <li>• High abrasion resistance</li> <li>• Non fraying/ cold cut</li> <li>• Water and soil repellent</li> </ul>
Note	Flame retardant finish available on request

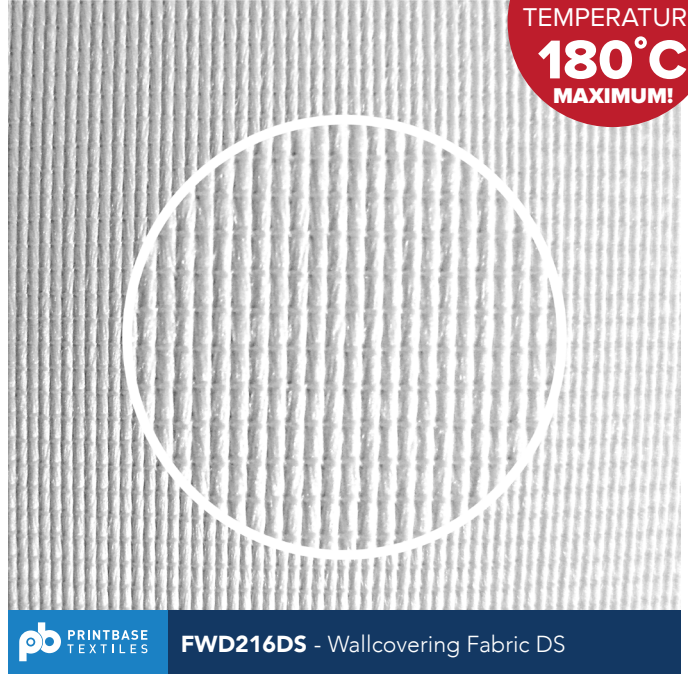

**pb** PRINTBASE TEXTILES **FWD216DS - Wallcovering Fabric DS**

CARRY WITH 2 PEOPLE	CAUTION: HEAVY	DO NOT DROP/BUMP	STORE IN COOL / DRY CONDITIONS	PRINTING SIDE ON INSIDE OF ROLL

### Print widths available:

--	--	--	--

### Perfect for:

- WALLPAPER
- WALL COVERING
- SURFACE COVER

**SCAN to View this item online**



--	--	--	--	--	--