


**FWD216DS FR WR**

**Printex™ Wallcovering Fabric DS FR WR**

Seamless wall covering fabric with grey blackout back. No need to prepare wall surfaces by pre painting white. Simply clean wall and apply fabric over existing colour. Treated with water repellent and flame retardant finishes to European standard DIN 4102 Level B1 or American standard ASTM E84.

**ATTENTION!**  
 SUBLIMATION  
 TEMPERATURE  
**180°C**  
 MAXIMUM!


PRODUCT SPECIFICATIONS	
Quality:	FWD216DS FR WR
Description:	Wall covering
Wallcovering Type:	Type 2 - High Trafficked and Commercial Spaces
Composition:	100% Polyester
Construction:	Polyester Warp Knit with acrylic grey back
Finish:	Flame Retardant and Water Repellent Coating
Fire Rating:	DIN 4102 B2
Anti Microbial:	Bactericidal and Fungicidal
Colour Fastness:	Excellent Adhesion - Subject to Sublimation Process
Widths:	160cm, 260cm, 320cm
Thickness:	1mm
Mass:	315g/m <sup>2</sup>
Colour:	WH001
Print Route:	
Features & Benefits:	<ul style="list-style-type: none"> <li>• PVC Free</li> <li>• High abrasion resistance</li> <li>• Non fraying/ cold cut</li> <li>• Water and soil repellent</li> </ul>

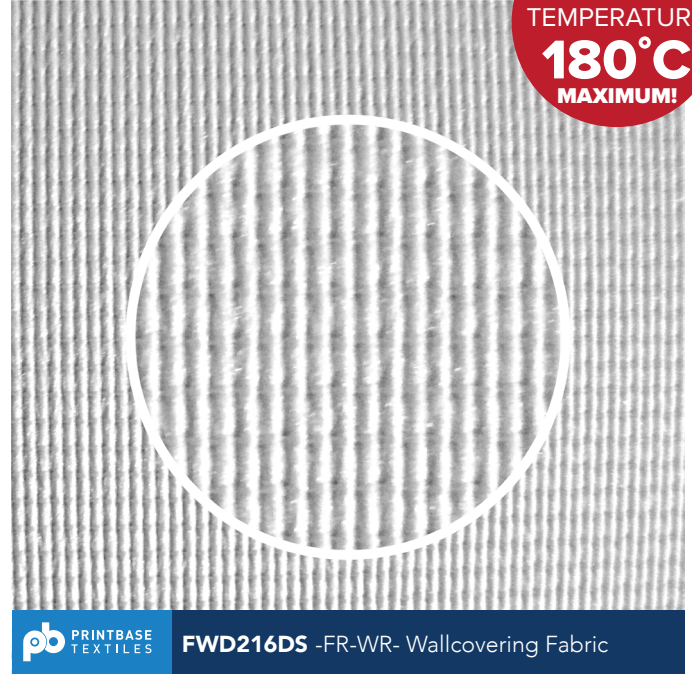

**pb** PRINTBASE TEXTILES **FWD216DS -FR-WR-** Wallcovering Fabric



**Print widths available:**

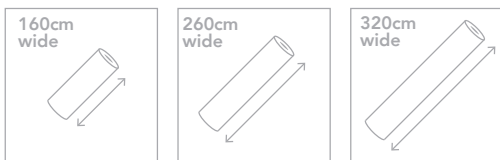

**Perfect for:**

- WALLPAPER
- WALL COVERING
- SURFACE COVER



SCAN to View  
 this item online

