

FPR240

Printex™ Backlit


Our specially developed backlit fabrics are engineered to promote light dispersion and produce impressive backlit displays.

ATTENTION!
 SUBLIMATION
 TEMPERATURE
200°C
 MAXIMUM!

PRODUCT SPECIFICATIONS	
Quality:	FPR240
Finish	OBA Gel (Optical Brightening Agent)
Composition	100% Polyester
Description	Backlit Banner fabric
Widths	160cm, 260cm, 320cm
Mass	220g/m ²
Colour	WH001
Print Route	
Shrinkage:	Shrinkage may occur during the dye sublimation heating process. It is vital to do a test print to calibrate the heat press or modify the art file. Alternatively, the fabric can be pre-shrunk prior to printing.
Press Speed	0.5m/h
Features & Benefits:	<ul style="list-style-type: none"> • PVC Free • High tensile strength • Non fraying/cold cut
Note	Flame retardant finish available on request
CARRY WITH 2 PEOPLE CAUTION: HEAVY DO NOT DROP/BUMP STORE IN COOL / DRY CONDITIONS PRINTING SIDE ON INSIDE OF ROLL	





Print widths available:

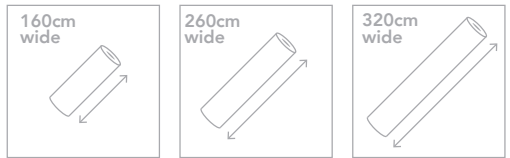

Perfect for:

- LIGHT BOXES
- FABRIC FRAMES



SCAN to View
 this item online

